

TECHNICAL DATASHEET

NM125-6EU

Traction battery

NORDMAXTM

Technical data

General

Nominal voltage	6 V (3 cells per unit)
Length	244 mm
Width	190 mm
Height	274 mm
Container Height	-
Approx. Weight	29,4 kg
Terminal	A
Handle	Yes
Container material	PP


Electric specifications

Rated capacity C5 to 1,70 VpC	197 Ah
Rated capacity C20 to 1,75 VpC	240 Ah
Reserve capacity @25 A	505 min
Reserve capacity @56 A	-
Reserve capacity @75 A	-

Temperature range

Charge/discharge	-20 - 45 °C
Storage	-15 - 40 °C
Self discharge	5-15 % per month

Battery charge conditions at 25 °C

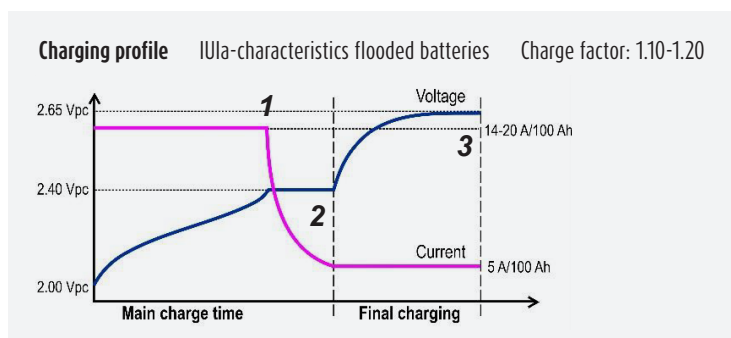

Capacity affected by temperature

40 °C	102 %
25 °C	100 %
0 °C	85 %
-15 °C	65 %



- Dimensions according to international standards
- Accurately selected products
- High cycle resistance
- Equivalent to TROJAN

Dimensions

NORDMAX

Batteripoolen AB | kundsupport@batteripoolen.se | 075-242 43 00 | www.batteripoolen.se