

TECHNICAL DATASHEET

NM1275-12ET

Traction battery

NORDMAX™

Technical data

General

Nominal voltage	12 V (6 cells per unit)
Length	328 mm
Width	180 mm
Height	279 mm
Container Height	248 mm
Approx. Weight	37 kg
Terminal	ELPT
Handle	Optional
Container material	PP


Electric specifications

Rated capacity C5 to 1,70 VpC	120 Ah
Rated capacity C20 to 1,75 VpC	150 Ah
Reserve capacity @25 A	280 min
Reserve capacity @56 A	-
Reserve capacity @75 A	102 min

Temperature range

Charge/discharge	-20 - 45 °C
Storage	-15 - 40 °C
Self discharge	5-15 % per month

Battery charge conditions at 25 °C

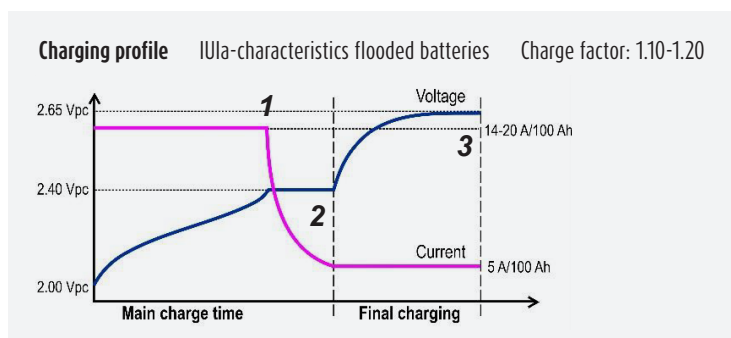



Capacity affected by temperature

40 °C	102 %
25 °C	100 %
0 °C	85 %
-15 °C	65 %



- Dimensions according to international standards
- Accurately selected products
- High cycle resistance
- Equivalent to TROJAN

Dimensions

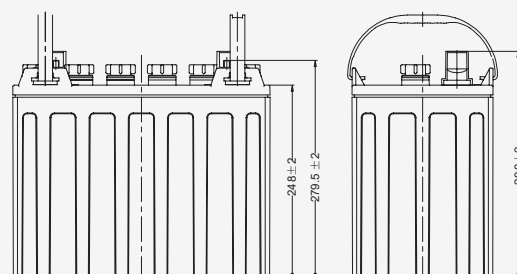

Terminal		
D	Positive	19.5 ^{+0.3} _{-0.3}
	Negative	17.9 ^{+0.3} _{-0.3}

NORDMAX

Batteripoolen AB | kundsupport@batteripoolen.se | 075-242 43 00 | www.batteripoolen.se